


PolySto PV8Fi and PV15Fi skirtings

PolySto PV8Fi and PV15Fi skirtings are prefabricated full core recycled PVC skirtings covered with 0,5mm AISI 304 horizontal brushed stainless steel with sloped top and skirting to wall-floor according to hygienic requirements.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere).
Finishing of the joints using PolySto Food Safe Sealant or a chemical welding HygiSeal (RAL 7004).

PV8Fi



IMPACT CLASS 1
no impact

Technical info

	Kerb
Length	2.000 mm
Height	84 mm
Thickness	9 mm
Weight	3 kg
Amount / pallet	1.000 m
Pallet size	210 x 80 x 70cmH
Pallet weight	+/- 1.530 kg
Temperature resistance	-30°C - +60°C (long exposure)


Average consumption of (per meter)

Food Safe Sealant or HygiSeal (RAL 7004)	60 cc
Food Safe sealant transparent	60 cc
Hard Fix Glue	120 cc

Installation m/day (8h) with 1 installer

Food Safe Sealant	60 meter
HygiSeal	30 meter

PV15Fi

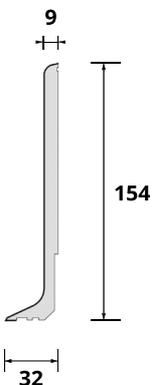

IMPACT CLASS 1
no impact

Technical info

	Kerb
Length	2.000 mm
Height	154 mm
Thickness	9 mm
Weight	6 kg
Amount / pallet	500 m
Pallet size	210 x 80 x 70cmH
Pallet weight	+/- 1.530 kg
Temperature resistance	-30°C - +60°C (long exposure)

Average consumption of (per meter)

Food Safe Sealant or HygiSeal (RAL 7004)	65 cc
Food Safe sealant transparent	100 cc
Hard Fix Glue	220 cc

Installation m/day (8h) with 1 installer

Food Safe Sealant	40 meter
HygiSeal	30 meter

Kerb

